

## Crimp contact - CK4,0-ED-2,50ST AG - 1663242


Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Turned 4.0 crimp contact, individual male contact, core diameter 2.50 mm<sup>2</sup>, silver-plated

RoHS

### Key Commercial Data

Packing unit	25 STK
GTIN	 4 017918 123055
GTIN	4017918123055

### Technical data

#### Electrical characteristics

Note	For HC-M-3 modules
------	--------------------

#### Ambient conditions

Ambient temperature (operation)	-40 °C ... 125 °C
---------------------------------	-------------------

#### Mechanical characteristics

Conductor cross section	2.5 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>
Connection cross section AWG	14
Stripping length of the individual wire	9 mm
Contact diameter	4 mm
Insertion/withdrawal cycles	≥ 500

#### General

Type	Individual male contact
Series	HC-M-03
Connection method	Crimp connection
Contact type	turned

#### Material data

Contact material	Copper alloy
------------------	--------------

# Crimp contact - CK4,0-ED-2,50ST AG - 1663242

## Technical data

### Material data


Contact surface material	silver-plated
--------------------------	---------------

### Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
China RoHS	Environmentally Friendly Use Period = 50
	For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"

## Drawings

Dimensional drawing

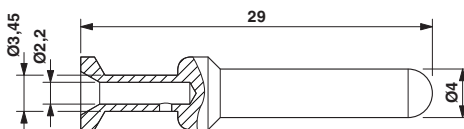

## Approvals

Approvals

Approvals

EAC / EAC

Ex Approvals

### Approval details

EAC		RU C- DE.AI30.B.01102
-----	--	--------------------------

EAC		EAC-Zulassung
-----	--	---------------

Phoenix Contact 2018 © - all rights reserved  
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG  
Flachmarktstr. 8  
32825 Blomberg  
Germany  
Tel. +49 5235 300  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.com>