





SPECIFICATIONS

PARAMETERS	VALUES	UNITS
RATED INPUT POWER	0.8	W
MAX INPUT POWER	1.0	W
IMPEDANCE	8 ±15%	OHM
OUTPUT SPL @ 0.1W/0.1M (AT 1.0, 1.6, 2.0, 3.2 kHz)	90 ±3	dBA
RESONANT FREQUENCY	850 ±20%	Hz
FREQUENCY RANGE	850~ 20,000	Hz
HOUSING MATERIAL	LCP	-
CONE MATERIAL	KAPTON	-
MAGNET MATERIAL	SMCO	-
OPERATING TEMPERATURE	-40~+85	°C
WEIGHT	1.5	grams

THIS DOCUMENT CONTAINS DATA PROPRIETARY TO PROJECTS UNLIMITED, INC. ANY USE OR REPRODUCTION, IN ANY FORM, WITHOUT PRIOR WRITTEN PERMISSION OF PROJECTS UNLIMITED, INC. IS PROHIBITED.
©2003, Projects Unlimited Inc.


REVISION HISTORY

LTR	DESCRIPTION	DATE	APPROVED
-	RELEASED FROM ENGINEERING	10/11/2006	

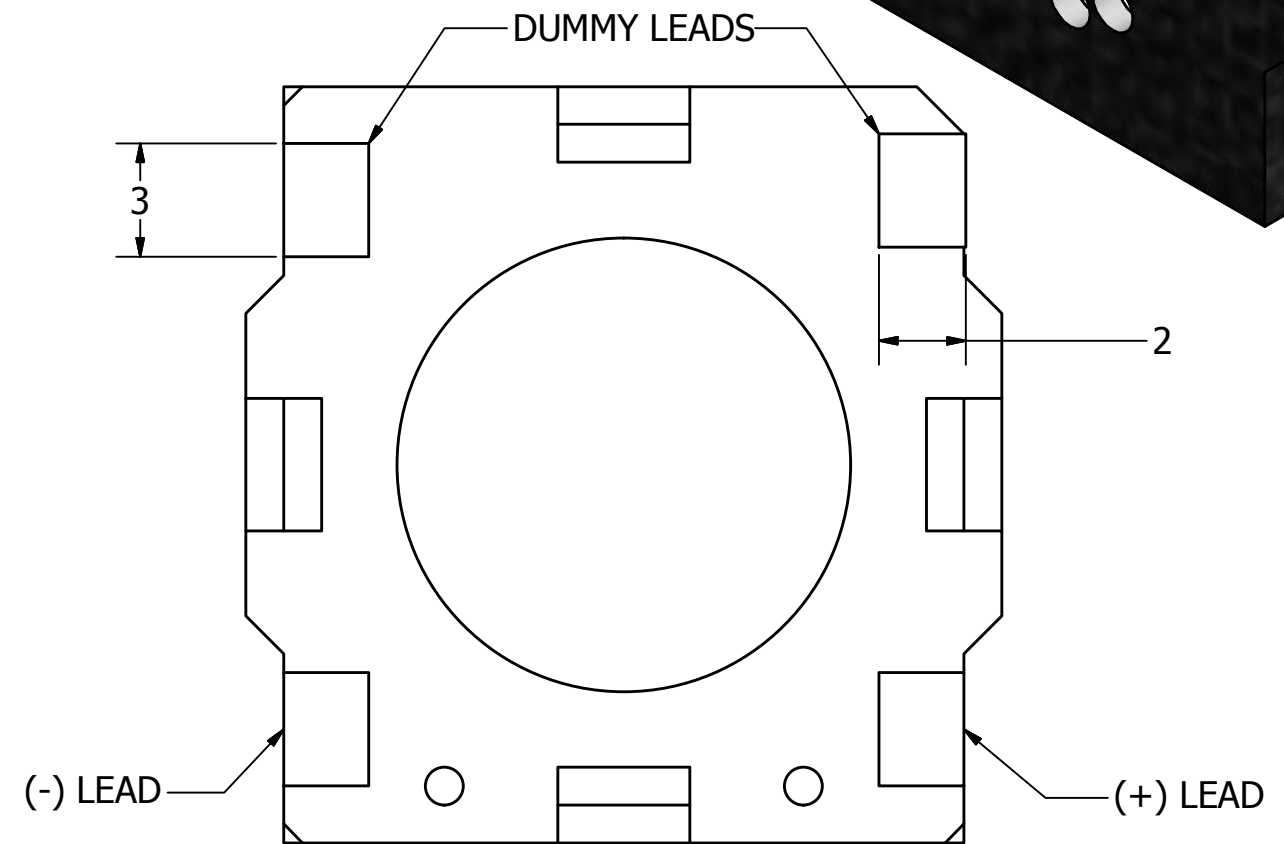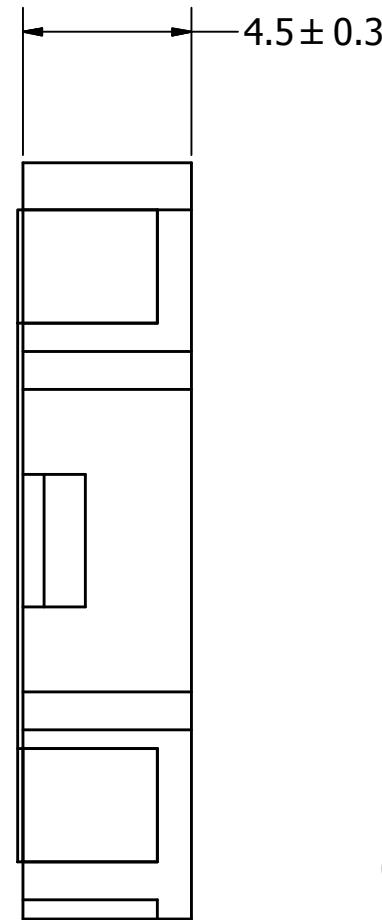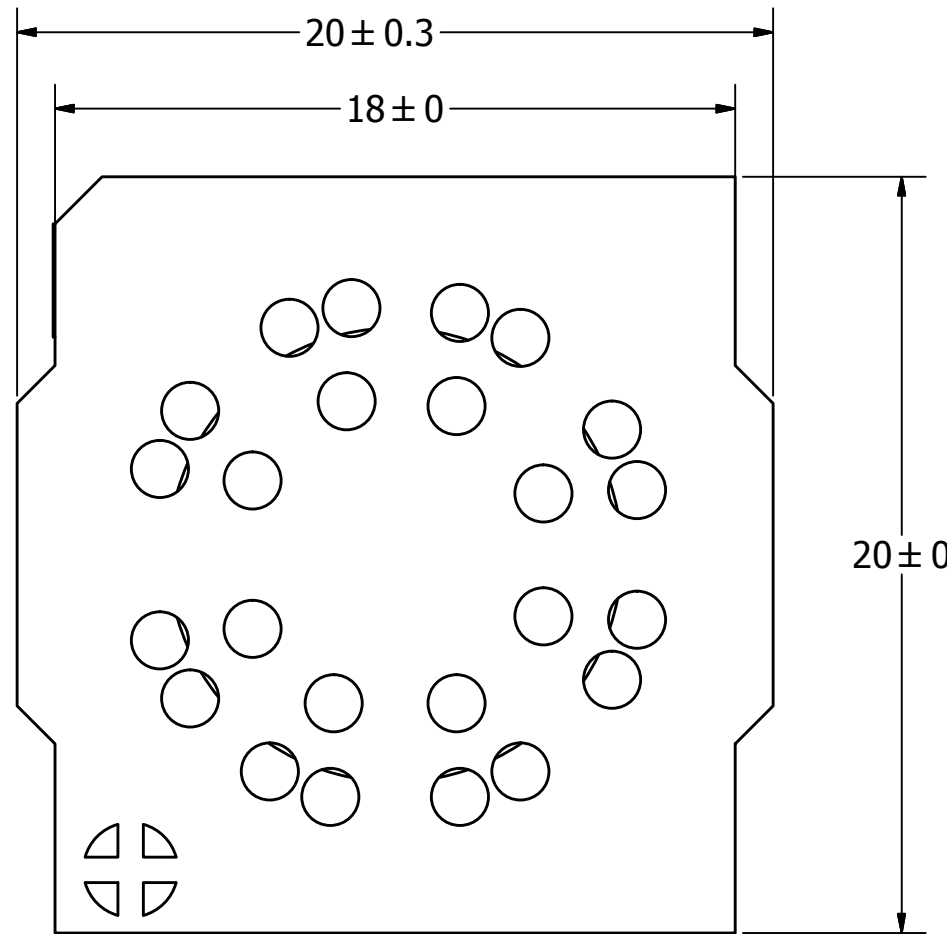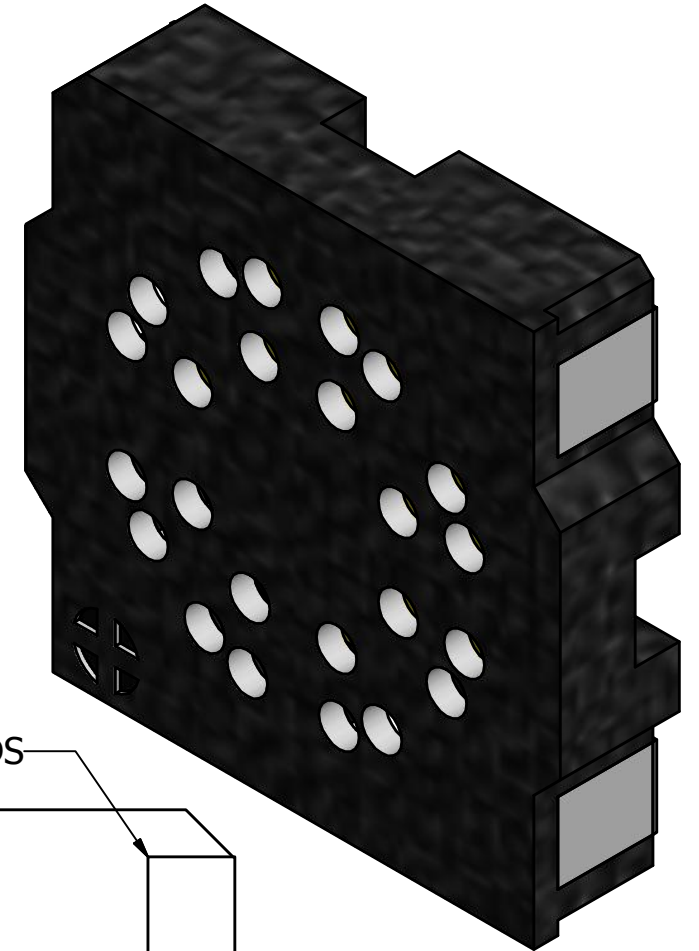

NOTES:

1. ALL DIMENSIONS ARE IN MILLIMETERS.
2. SPECIFICATIONS SUBJECT TO CHANGE OR WITHDRAWL WITHOUT NOTICE.
3. THIS PART IS RoHS 2011/65/EU COMPLIANT.

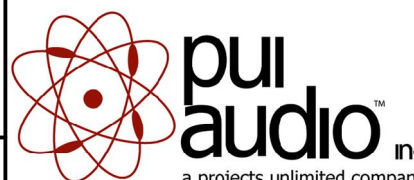UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS, TOLERANCES ARE ±0.5 AND ANGLES ARE ±3°.	SIZE A3	Designed by	Date	Checked by	Date	Approved by	Date	Drawn Date
		M.V.	8/25/2015	B.R.	8/25/2015	R.W.	8/25/2015	7/29/2013
SMS-2008MS-R.idw				SMS-2008MS-R				
		SMS-2008MS-R			Edition	Sheet		
					-	1 / 1		